


ACCENT: Using & Programming a Remote Control

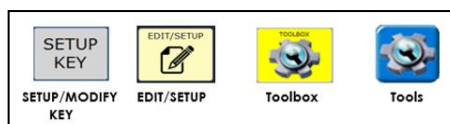

Click [HERE](#) to download NuVoice PASS

Technical Support:

Tel: +44 (0)1733 370 470 (Option 2)

Email: info@liberator.co.uk

Regional AAC Consultants:

If you wish to speak to your Regional AAC Consultant, please call +44 (0)1733 370 470 (Option 3)

With its built-in infrared (IR), your device can learn IR signals for any device you own that has a remote control.

Setting up a Remote Control Commands Page Using Pre-stored Commands

The remote-control commands for many popular brands such as Samsung, Sony, Sky, etc. have already been stored onto pages within the Accent. This saves you having to teach your Accent device any IR commands.

1. Go to **TOOLS > TOOLBOX > REMOTE CONTROLS**.
2. Select **USE REMOTE CONTROL WIZARD**.
3. Type a name for the remote page, e.g. Lounge TV.
4. Type the device manufacturer for the remote, e.g. Sony, and select **OK**,
5. Choose the type of device from the list and select **OK**. Select **YES** to "Create a Page for this Remote Control".
6. If prompted, select the TYPE of device, e.g. 3D TV, etc, then select **OK**.
7. Select a GRID size for your page that is the same as your default vocabulary grid size, select **OK**.
8. Select **YES** to modify the new IR commands page, or **NO** if you don't wish to, then select **OK** to exit
9. You may now link your page where you wish. All pre-programmed pages are pre-fixed by IR-, so for example your Lounge TV page will be displayed in the Page menu as, **IR-Lounge TV**.


NOTE: See the "Accent General Programming" Quick Reference Guide for instructions on linking and customising pages.

Re-learning Remote Control Command(s) for an Existing Device/Page

Before you begin to store any signals, ensure the **Remote Control** is at hand and you are in the same room as device you want to use the IR functions on.

1. Go to **TOOLS > TOOLBOX > REMOTE CONTROLS**.
2. Use the arrow keys to scroll through the "Remote Controls added" list to select the device/ appliance whose signals you want to teach or change, e.g. **TV**.
3. With the name of the device highlighted, press the **MODIFY SELECTED REMOTE CONTROL** button.
4. Use the arrow keys to scroll through the "function list" to select the function that you want your device to learn, e.g. **Power**.
5. Make sure you know which button you wish to use. Point the remote 6-8" away from your device's **IR** window.

6. Using the remote control, press the function (key that you want the device to learn), e.g. **Power** key. A beep will be heard when the device accepts the signal.

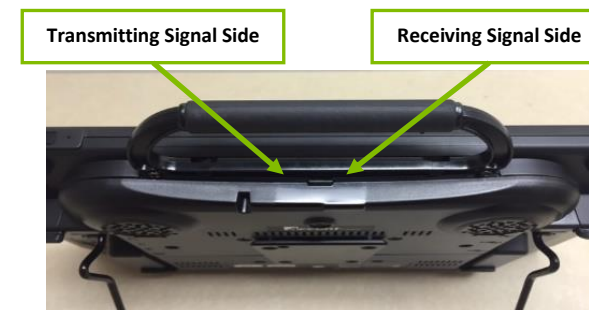

7. The signal may be tested using your device. Point your device's **IR** window towards the appliance being tested (e.g. the **TV**) and press the **TEST SIGNAL** button.
8. Repeat **the above steps** for each function you want your device to learn.

Adding a New Device to Remote Controls

This instruction talks you through manually adding remote control commands. You will need to create a page if you want to use these commands in a page and link it.

1. Go to **TOOLS > TOOLBOX > REMOTE CONTROLS**.
2. Select **ADD REMOTE CONTROL MANUALLY**.
3. Type the device name, e.g. **BEDROOM TV**, select **OK**.
4. Type in the name of the function to be added, e.g. **POWER ON**, select **OK**.
5. You will now be asked to **Learn the signal**, do this by pointing the remote 6-8" away from your device's **IR** window.
6. The signal may be tested using your device. Point your device's **IR** window towards the appliance being tested and press the **TEST SIGNAL** button in the menu.
7. Press **ADD A FUNCTION** to add in new functions by repeating the steps above.

Creating and Linking a Remote Control Page Manually

This assumes you want to store the **TV Remote** functions for the **DEVICE** (e.g. **BEDROOM TV**) onto the **REMOTES** page. You also want to be able to go to any other remote page from your **IR** page.

1. Go to the page where you wish to add a new page link
2. Select **TOOLS > EDIT/SETUP KEY**.
3. Select the button you want to open your new page from.
-  4. Select **ADD MESSAGE OR INSERT TOOL > PAGE LINK**.
5. Decide if you want your page to automatically close after a button is pushed ('close') or remain open ('open').
6. Select **CREATE NEW PAGE**.
7. Type the name of the page and select **OK**.
8. Select **CREATE PAGE FROM TEMPLATE**, then select **OK**.
9. Select **CHANGE LABEL** and name the button (e.g. **BEDROOM TV**).
10. Press **CHANGE PICTURE > SPELL ICON TO FIND** and type in the name of the picture, e.g. **TV**, then select **OK**. Choose a picture, press **OK**.
11. Now access your newly created page by pressing the key you just programmed.

Adding an IR Command to a Page

1. Select **TOOLS > EDIT/SETUP KEY** and select a blank key to program your first function.
-  2. Select **ADD MESSAGE OR INSERT TOOL > INSERT TOOL**.
3. Select **Spell TOOL to find** and type **IR**, then **OK**. Press button called **IR**. *(The screen should now display a list of your IR Devices)*.
4. Select the **IR** device (e.g. **Bedroom TV**)
5. Select the function you wish to store (e.g. the **POWER** function). The programming displayed should read **<<IR(BEDROOM TV,POWER)>>**.
6. Select **OK**.
7. You may change the **Picture & Label** if needed. Press **OK** to exit.

8. The programmed **Function** for your **Remote Control Page** is now available for use.
9. Repeat **steps 5-11** to add the rest of your functions for your **IR Page**.
10. Select **OK** to exit.

Adding a Remote Control Command With Multiple Commands (e.g. A 3-digit channel - 103 ITV)

To program a TV channel with more than 1 digit, e.g. 103, you need to create a macro for one key that contains 1, 0, & 3. **Your Device must already know the signals** for the individual functions, 1 & 0 & 3. If you haven't taught the signals to your device yet, do so before going ahead with the exercise below.

1. Go to the **Remote Control Page** where you want to add multiple commands.
2. Select **TOOLS > EDIT/SETUP KEY**.
3. Select a blank key to program a channel (e.g. channel **103**).
-  4. Select **ADD MESSAGE OR INSERT TOOL > INSERT TOOL**
5. Select **Spell TOOL to find** and type **IR**, then **OK**. Press button called **IR**.
6. Select the programmed IR as your **Device** (e.g. **Bedroom TV**).
7. Select the **Channel 1** Button from the list of functions.
8. Repeat **Steps 4-7 above** until you build the channel **1 0 3** as shown below:
**<<IR(BEDROOM TV,1)>> <<IR(BEDROOM TV,0)>>
<<IR (BEDROOM TV,3)>>**, then press **OK**.
9. You have now created your Macro for Channel **103**. If you want to change the **Picture** and **Label** you can do so.
10. Select **OK** to exit.

NOTE: To program similar channels/functions repeat the above steps. When the signals for a device have been successfully stored, a small dot appears beside the name of that device within the SET-UP MENU. A dot also appears beside the functions that have signals stored. This is visible in the IR Set-Up Menu.

If you are using a mouse to edit, go to the page where you wish to add/edit your word/phrase, **right click** on the button to edit, and select **EDIT**. Then continue programming from where the mouse symbols is displayed. 